




P&PE
PUMPS & PROCESS EQUIPMENT INC.

To Request a Quote,
CALL US 1-847-882-8116

Type MS50, 2MS75MDSS

 **Flows to 60 GPM / Heads to 380 feet**

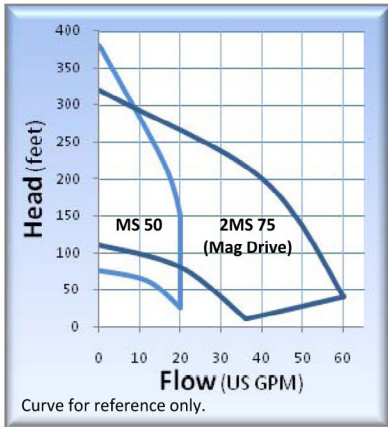

MODELS:

1-6MS50 – 1/2" x 3/4" x 4.12"

2MS75MDSS – 3/4" x 1" x 6.00"



2MS75MDSS

MATERIALS:

- SS (316 Stainless Steel)

FEATURES (MS50):

- Vertical option available
- Optional power frame available
- Standard mechanical seal: 5/8" Type 21 Viton®, carbon vs. ceramic
- NEMA 56C motor frame - Standard

FEATURES (2MS75):

- Sealless Mag Drive
- NEMA 56C motor frame - Standard
- Bushing options: Alpha Silicon Carbide
- O-Ring options: EPR, Teflon® Encapsulated, Kalrez®, Fluro-Silicon



6MS50

APPLICATIONS:

- Deionized water system
- Ultra-filtration system
- Laser system cooling
- Reverse osmosis systems
- Acid handling